


LIGHT-EASY



Light-Easy controller

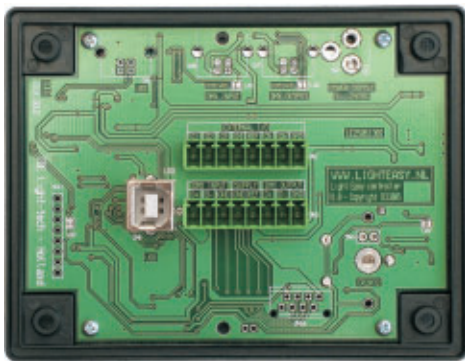

Rear side of Light-Easy

- Very compact DMX512 wall controller
- Fits on a standard wall mounting box
- 256 channel DMX-512/1990 controller
- DMX-input for DMX-trigger / recorder functions
- MENU controlled graphical user interface
- Programmable cross fades (1 sec. / 99 min.)
- 4096 memory scenes (16 megabit)
- Real-time clock for time-scheduling programs
- Program and Master-dim function
- Programmable WAKE-UP and AUTO-RUN
- On/off button (BLACK-OUT function)
- Programmable LOCK with PIN-code
- RS232 / RS485 A/V interface (Domotica)
- USB PC-interface for memory-backup, PC-control and firmware updates
- External programmable remote inputs for external scene and program access
- Available in Black or Grey finish and as desktop enclosure

Specifications:

Power supply: 5~18 VDC

Current: 50~20 mA

Dimensions: 110 x 85 x 15 mm

Weight: 165 g (Desktop)

WWW.RGB-LED.NL

LED CONTROLLERS



Christmas Lighting ING House, Amsterdam. Project realised by Jurlight, Holland.